

Grainer Clipper

Horizontal, cylindrical surface cleaning machine (clipping of pubescence).

- A special working chamber ensures a high degree of reduction of pubescence.
- The special air system applies cool air in precise amounts, that helps to cool the machine and remove fine pubescence.



Grainer Clipper

Mode of operation

The feeding product contains a mixture of unshelled and shelled oat kernels and loose husks.


A screw conveyor is feeding the product into the working chamber.

The degree of losing the pubescence is controlled by the counter pressure plate at the goath outlet. This plate is adjustable which influences the degree of cleaning.

- Special steel for feeding screw and ridged cylinder guarantees long lifetime.
- Solidly built screens assure long lifetime.

Technical data					
Type	Capacity* Main Drive to/h	Motor Capacity kW	Aspiration		Net Weight kg
			m ³ /min.	daPa	
PM H 1	up to 2.0	up to 11	20	100	400
PM H 2	2.0 – 5.0	up to 22	30	100	700

* The capacity depends on the variety of the raw product and the cleaning degree. We reserve the right to deviate from illustrations and data as improvements are constantly being made.

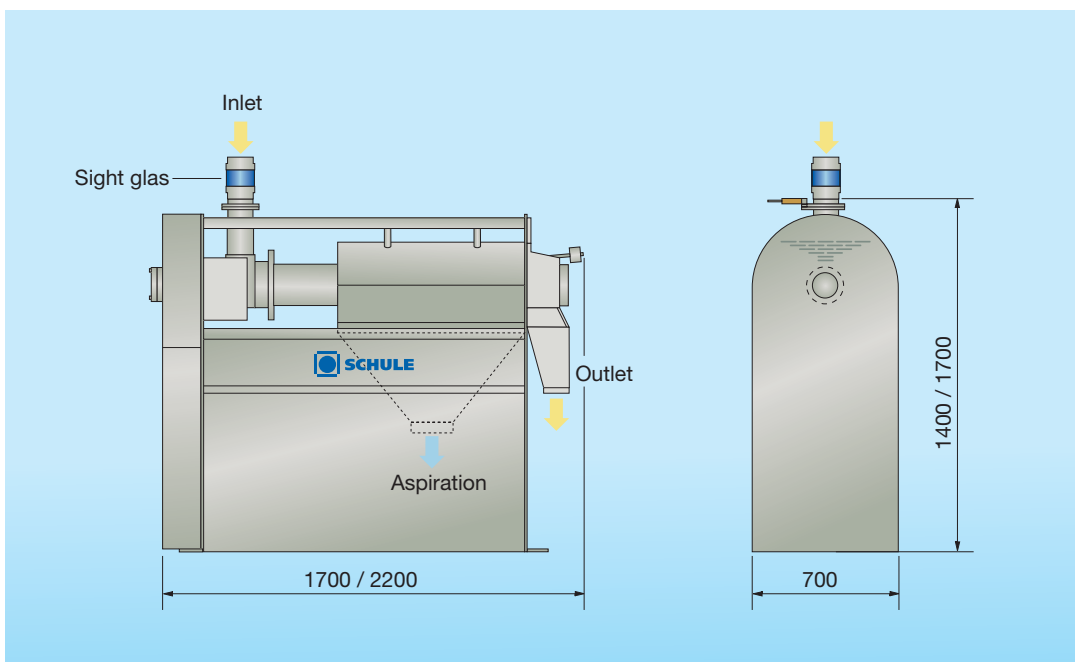

F. H. SCHULE MÜHLENBAU GmbH

Dieselstraße 5-9
D - 21465 Reinbek / Hamburg
Telefon: (040) 7 27 71 - 0
Fax: (040) 7 27 71 - 710

schule@amandus-kahl-group.de

www.schulefood.de

