



## SCHLITZ-O-MAT Bag Opener

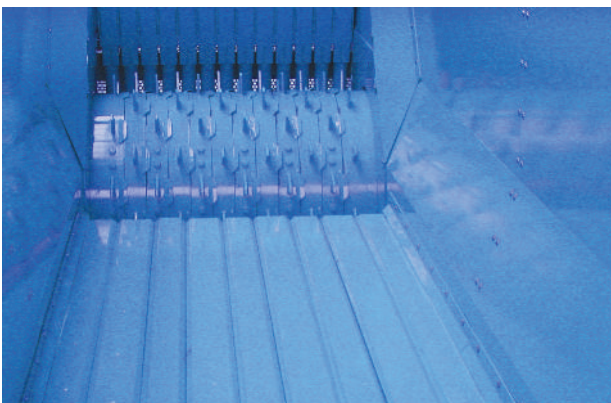

- Virtually 100% opening and emptying of the plastic bags
- High opening rate of “bags within bags”
- Suitable for a wide range of material, e.g. light weight packaging material, biowaste, residual waste
- Overload protection, integrated function and blockage system
- Infinitely adjustable throughput rate
- Loosened up and evened out material supply to the sorting process
- Low servicing and maintenance requirements
- Safe tangling protection against strings, wires and foils
- Large storage hopper for feeding by front-end loader

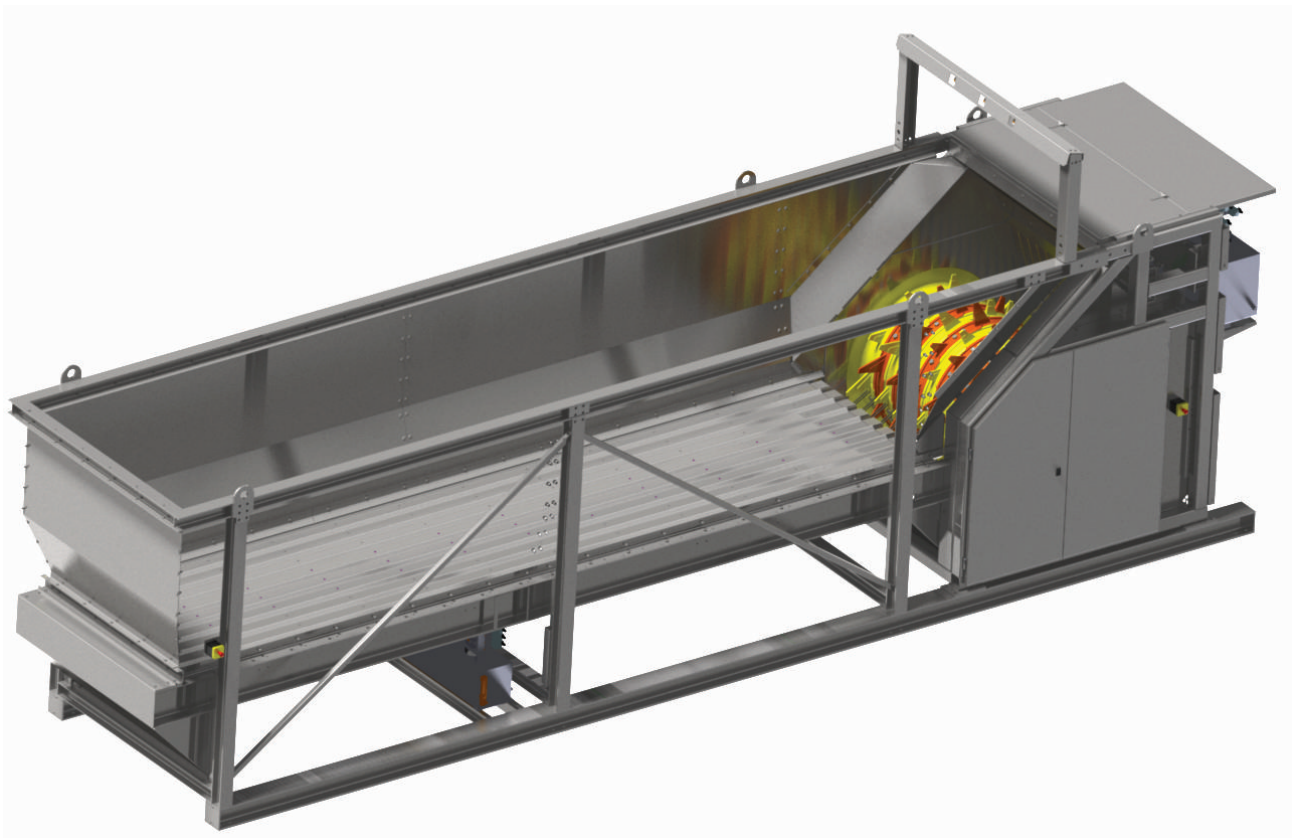

## Short Description

The SCHLITZ-O-MAT Bag Opener opens the plastic sacks and transfers the metered material to the subsequent sorting- and preparations plants. The SCHLITZ-O-MAT is available as standard model and combined with a charging hopper. The hopper is fed batchwise by a front loader.

Standard Model for **light weight packaging material and waste paper** (up to approx. 150 kg/ m<sup>3</sup>)

Type:	N 2-13-15	XL 2-17-15
Working Width:	1.300 mm	1.700 mm
Throughput at 50 kg/m <sup>3</sup>	5 t/h	6,5 t/h
Throughput at 100 kg/m <sup>3</sup>	10 t/h	13 t/h

Reinforced Model for **humid and residual waste**

Type:	MSW 2-13-15	MSW 2-13-22	MSW 2-17-15	MSW 2-17-22	MSW 2-21-15	MSW 2-21-22
Working Width:	1.300 mm	1.300 mm	1.700 mm	1.700 mm	2.100 mm	2.100 mm
Throughput at 50 kg/m <sup>3</sup>	5 t/h	6 t/h	6,5 t/h	7,5 t/h	8 t/h	9 t/h
Throughput at 100 kg/m <sup>3</sup>	10 t/h	12 t/h	13 t/h	15 t/h	16 t/h	18 t/h
Throughput at 200 kg/m <sup>3</sup>	16 t/h	20 t/h	23 t/h	26 t/h	27 t/h	32 t/h
Throughput at 300 kg/m <sup>3</sup>	18 t/h	24 t/h	30 t/h	36 t/h	40 t/h	45 t/h